



1900 x 130 x 80 mm



5 kg



Steel / HDG




BS EN 13374, class A

Description


The VT Tank Post 1900 combines the VT Tank Foot and a steel post as one unit. It is ideal for when extended height is required with the use of a Top up Barrier.

This is a very cost effective and quick solution due to the reduction in the number of components required. It's also very robust with minimal deflection due to its steel construction.

A distinct tether point marked with orange labeling indicates where a user should connect a carabiner or similar.

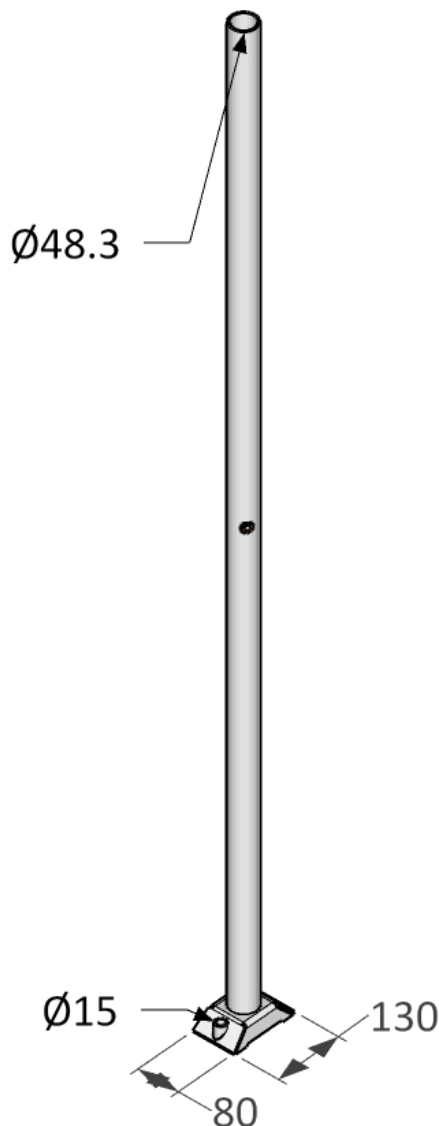

mm

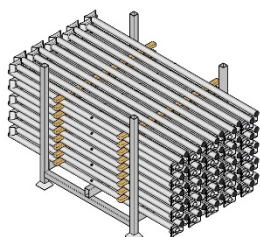

100 pcs / Stillage



1900 x 1133 x 1180 mm



534 kg

Means of Fixation

Tensile load of the screws min. 10 kN
→ Hilti HUS3-H10 L-130mm or the like / better, assembly torque limit min. 60 Nm

General Safety

Health and Safety Regulations should be followed at all times.

For more information:

→ viva-tec.co.uk/safety



1900 x 130 x 80 mm



5 kg





Steel / HDG



BS EN 13374, class A

The VT Tank Post 1900 is ideal for use with a standard Mesh Barrier and Top Barrier.

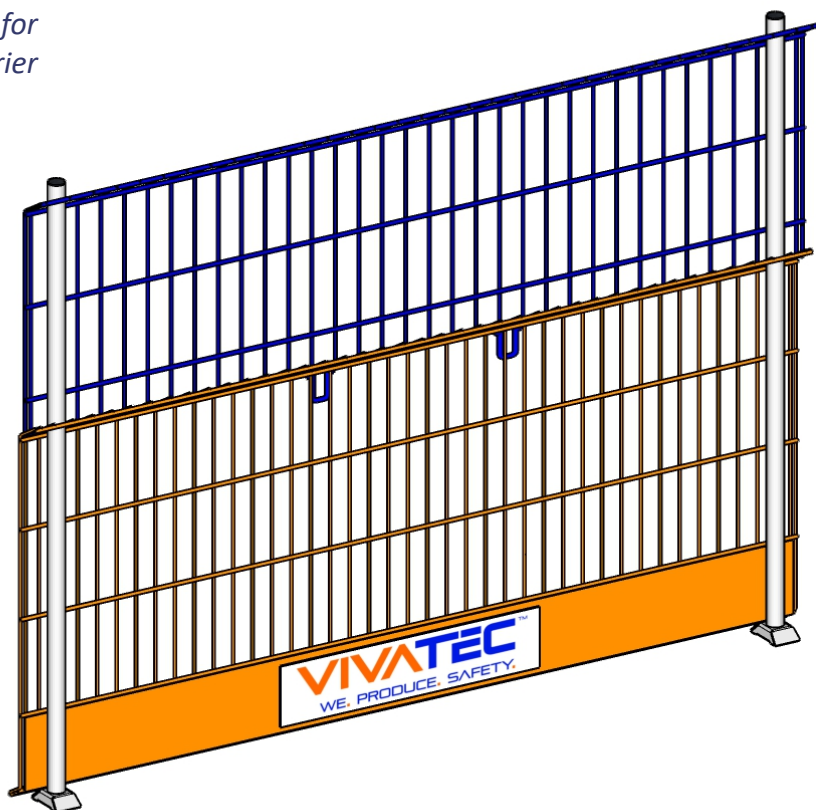

100 pcs / Stillage



1900 x 1133 x 1180 mm



534 kg

Means of Fixation

Tensile load of the screws min. 10 kN
→ Hilti HUS3-H10 L-130mm or the like / better, assembly torque limit min. 60 Nm

General Safety

Health and Safety Regulations should be followed at all times.

For more information:

→ viva-tec.co.uk/safety